



Outdoor use

Modell 51.01

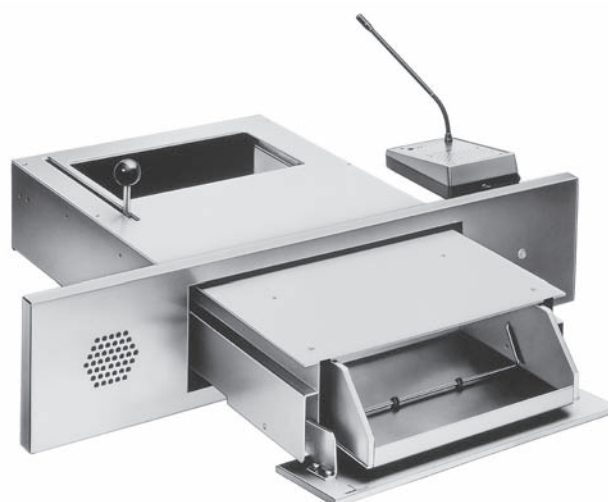

Use

Model 51.01 is a drive-in counter that comes ready for installation and comprises an integrated two-way intercom system. It is primarily aimed at outdoor use, in banks, on night shifts at chemists or petrol station forecourts. M3 firearm certification comes as standard.

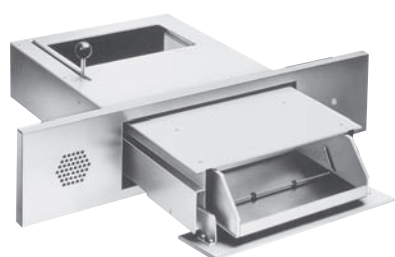

Safety and features

- Sliding pass-through with front panel and integrated intercom for automatic two-way conversation.
- For handing over objects and security bags up to 100 mm high
- Manual operation, or electric operation on request.
- Front cover opens automatically when sliding forward.
- Automatic lock when pulled back to fit flush with front panel. Lock can only be released by the operator behind the counter by using the lever.
- It is not possible to reach through the hole while the flat tray or deep tray is sliding, or manipulate the mechanism.
- Clip device for holding down banknotes.
- Materials offer firearms protection, capable of withstanding heavy handgun fire eg, up to 44 Magnum. Has received M3 certification from the firearms licensing authority.
- Model 51.01 fulfils German UVV regulations.

Materials and use

- Side walls made out of aluminium.
- Panel, carriage base and cover made out of stainless steel.
- Inner surface made out of a steel plate with black-brown powder coated cover.
- Front panel total thickness: 28 mm.
- All metal parts have been produced using state-of-the-art precision laser cutting technology for ultimate quality.
- Model 51.01 is suitable for outdoor use.
- The unit requires no maintenance. No need for cleaning or lubrication.

Outdoor use

Dimensions

(all measurements in mm)

Front panel 670 x 220 x 28

Pass-through (manual/electric) corresponding to wall recess

Width 450/630

Depth 610/610

Height 143/143

Extension 400

Hatch

Width 315

Depth 260

Height 100

Weight

67 kg

Miscellaneous

- Model can be adapted for use with pedestrians with access from above and no fold-down panel.
- Electric motor also available with adjustable sliding clutch and automatic switch to manual operation if power supply is interrupted.
- Available as Model 51 without front panel and two-way intercom.
- Coatings available in RAL colours on request.
- Fire protection up to F90 available on request for walk-up format.

Walter Wurster GmbH

Heckenrosenstraße 38

D-70771 Leinfelden-Echterdingen

Germany

Telefon: +49 (0) 711 / 9 49 62-0

Telefax: +49 (0) 711 / 7 97 72 90

e-mail: kontakt@IdeeninBlech.de

internet: www.IdeeninBlech.de

Modell 51.01

Installation and dimensions

The unit comes ready for mounting in prepared walls/façade recesses. Coming from the outside, it is mounted by inserting into the recess from above before screwing tight underneath the unit on the inside. Consideration must be given to access requirements and the possible need to remove the unit later in the unlikely event of repairs.

